

Full Electric Stacker

FW series


with straddle leg

Capacity 1200kg, 1500kg

Lifting height 1600-3300mm

Conforms to EN1757-1:2001, EN1727.

- Heavy duty design with top quality mast construction.
- Straddle leg design suitable for two faces or low pallet.
- Powerful drive wheel and power unit made in Europe
- Top quality electronic control system from Curtis.

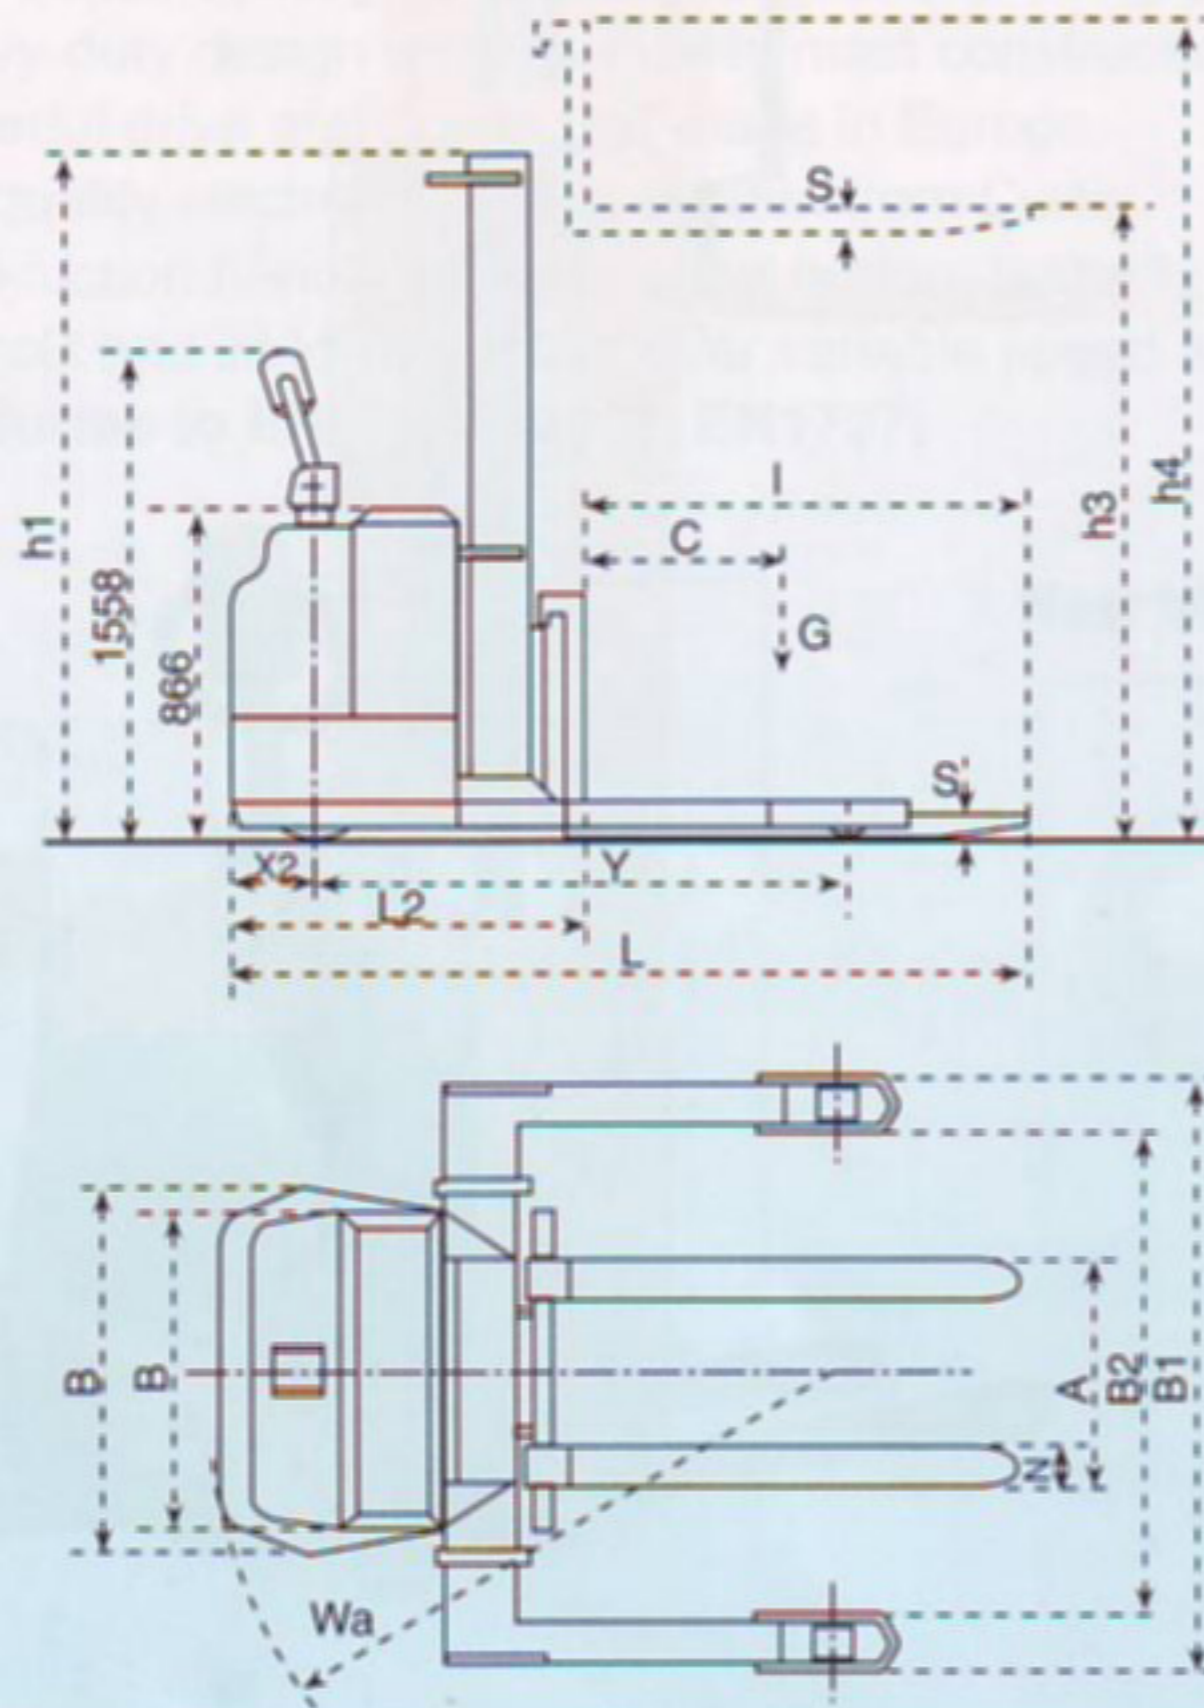

Model		FW1216	FW1516	FW1224	FW1524	FW1229	FW1529	FW1231	FW1531	FW1233	FW1533
Capacity	(kg)	1200	1500	1200	1500	1200	1500	1200	1500	1200	1500
Lifting Height	h3(mm)	1600		2450		2900		3100		3300	
Min. Fork Height	h(mm)	65		65		65		65		65	
Load Centre	C(mm)	500		500		500		500		500	
I	(mm)	1000		1000		1000		1000		1000	
s	(mm)	38		38		38		38		38	
X2	(mm)	200		200		200		200		200	
Y	(mm)	1283	1283	1283	1283	1283	1283	1283	1283	1283	1283
L2	(mm)	792	792	792	792	792	792	792	792	792	792
L	(mm)	1792	1792	1792	1792	1792	1792	1792	1792	1792	1792
B1	(mm)	1197-1502		1197-1502		1197-1502		1197-1502		1197-1502	
B2	(mm)	965-1270		965-1270		965-1270		965-1270		965-1270	
A	(mm)	230-790		230-790		230-790		230-790		230-790	
N	(mm)	100		100		100		100		100	
h1	(mm)	2166		1876		2101		2201		2301	
h3	(mm)	1600		2450		2900		3100		3300	
h4	(mm)	2460		3310		3760		3960		4160	
B	(mm)	940		940		940		1080		1080	
Wa	(mm)	1533	1533	1533	1533	1533	1533	1548	1548	1548	1548
Net Weight	(kg)	820	820	885	885	895	895	905	905	910	910
Service Free Battery		200Ah/24V									
Traction Battery (option)		240Ah/24V									
Battery Charger		20A/24V									
Motors	Travelling	1.2KW/24V									
	Lifting	2.2KW/24V									
Front Roller	(mm)	Polyurethane, Tandem Ø78x70mm									
Rear Roller	(mm)	Polyurethane, Ø150x75mm									
Drive Wheel	(mm)	Polyurethane, Ø250x80mm									
Minimum Qty.	(pcs)	2									