
DIESEL SPECIFICATIONS



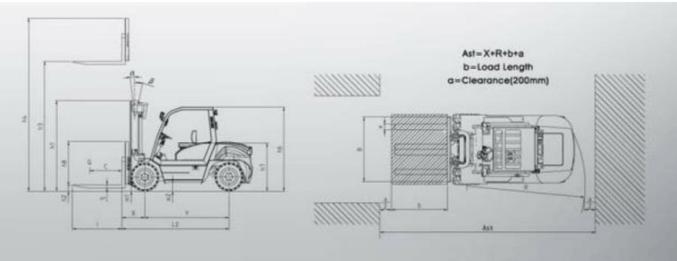

EQUIPMENT AND ACCESSORIES

Manufacturer				TAILIFT	TAILIFT	TAILIFT	TAILIFT
Model				FD60	FD70	FD80	FD100
Capacity Q		kg	6000	7000	8000	10000	
Load center C		mm	600	600	600	600	
Power type			Diesel	Diesel	Diesel	Diesel	
Control type				Sit	Sit	Sit	Sit
Total width B		mm	2010	2010	2260	2260	
Height mast lowered h1		mm	2500	2625	2700	2850	
Height mast extened h4		mm	4430	4430	4430	4320°	
Overhead guard height h6		mm	2450	2450	2520	2540	
Total length L2		mm	4755	4815	5410	5625	
Tires	Number (front/rear)			4/2		4/2	
	Size	Front	AA	8.25-15-14PR	8.25-15-14PR	8.25-20-14PR	9.00-20-14PR
		rear	AB	8.25-15-14PR	8.25-15-14PR	9.00-16-14PR	9.00-20-14PR
Engine	Model			Perkins 1106D	Perkins 1106D	Perkins 1106D	Perkins 1106D
	Output		Kw	117	117	117	117
	Speed		rpm	2200	2200	2200	2200
	No.of Cylinders/displacement		-/c.c.	6/6600	6/6600	6/6600	6/6600
	Fuel consumption		g / Kw.h	234.9	234.9	234.9	234.9
Transmission	Туре		Powershift				
	Manufacturer			OKAMURA			

* without load bracket